


NOTES:
 HOUSING: HIGH TEMPERATURE HOUSING UL94V-0
 WITHSTANDS IR AND VPR SOLDERING METHODS.
 CONTACTS: PHOSPHOR BRONZE.
 PLATING: GOLD PLATED.
 ELECTRICAL CHARACTERISTICS:
 CURRENT RATING:0.3 AMP.
 INSULATOR RESISTANCE:1000MΩ MIN. AT DC 250V.
 CONTACT RESISTANCE:90MΩ MAX. AT DC 100MA.
 OPERATING TEMPERATURE:-55°C ~+85°C .

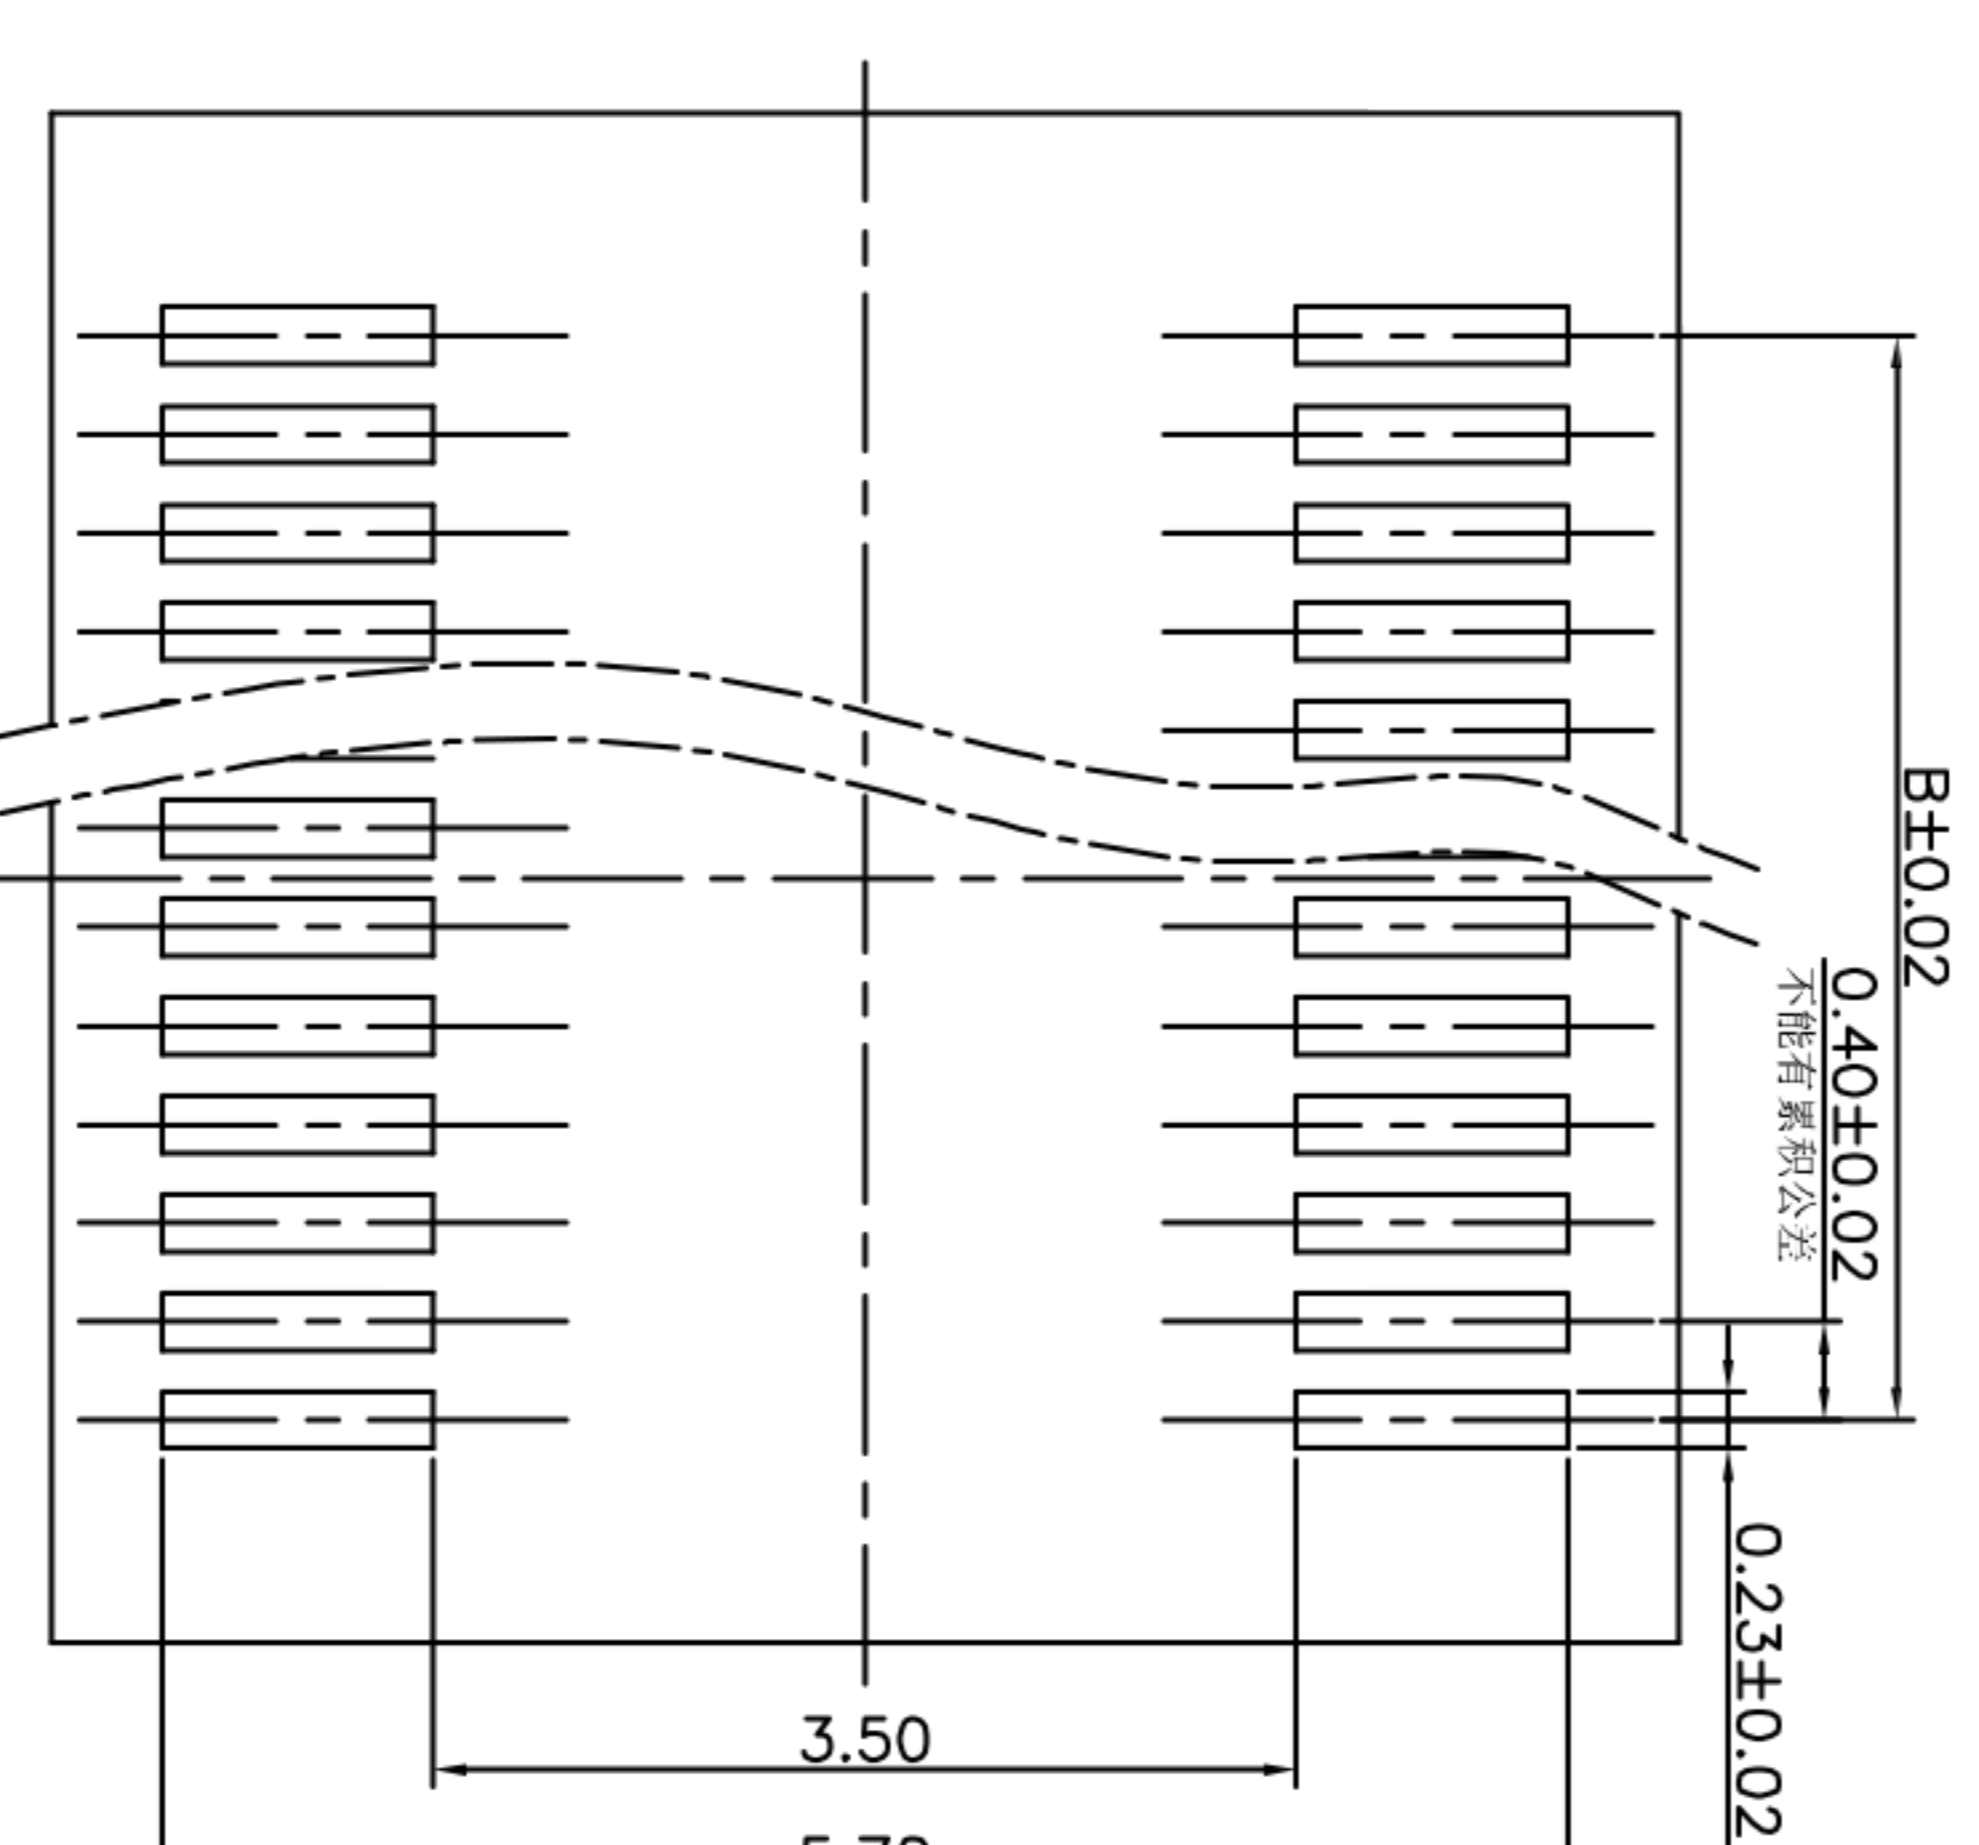

RECOMMENDED PCB LAYOUT
 TOP VIEW (TOLERANCE:±0.05)

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			

APPROVALS		DATE	深圳市联丰电子有限公司 SHENZHEN LIANFENG ELECTRONIC CO.,LTD			
DRAWN	ZHIWEI.CHEN	2015.07.07	TITLE:	0.4mm BTB H1.5mm	PART NO.	GP02-8XX-GXXS-B0R
CHECKED			UNIT:	mm	SCALE:	1:1
APPROVALS			DRAWING NO.		PROJ:	
TOLERANCES ARE		30~以上 ±0.30	ANGLE	±2°		
		10~30 ±0.20				
		5~10 ±0.15				
		~ 5 ±0.10				