


TOLERANCE
.0 ±0.25
.00 ±0.15
.000 ±0.05

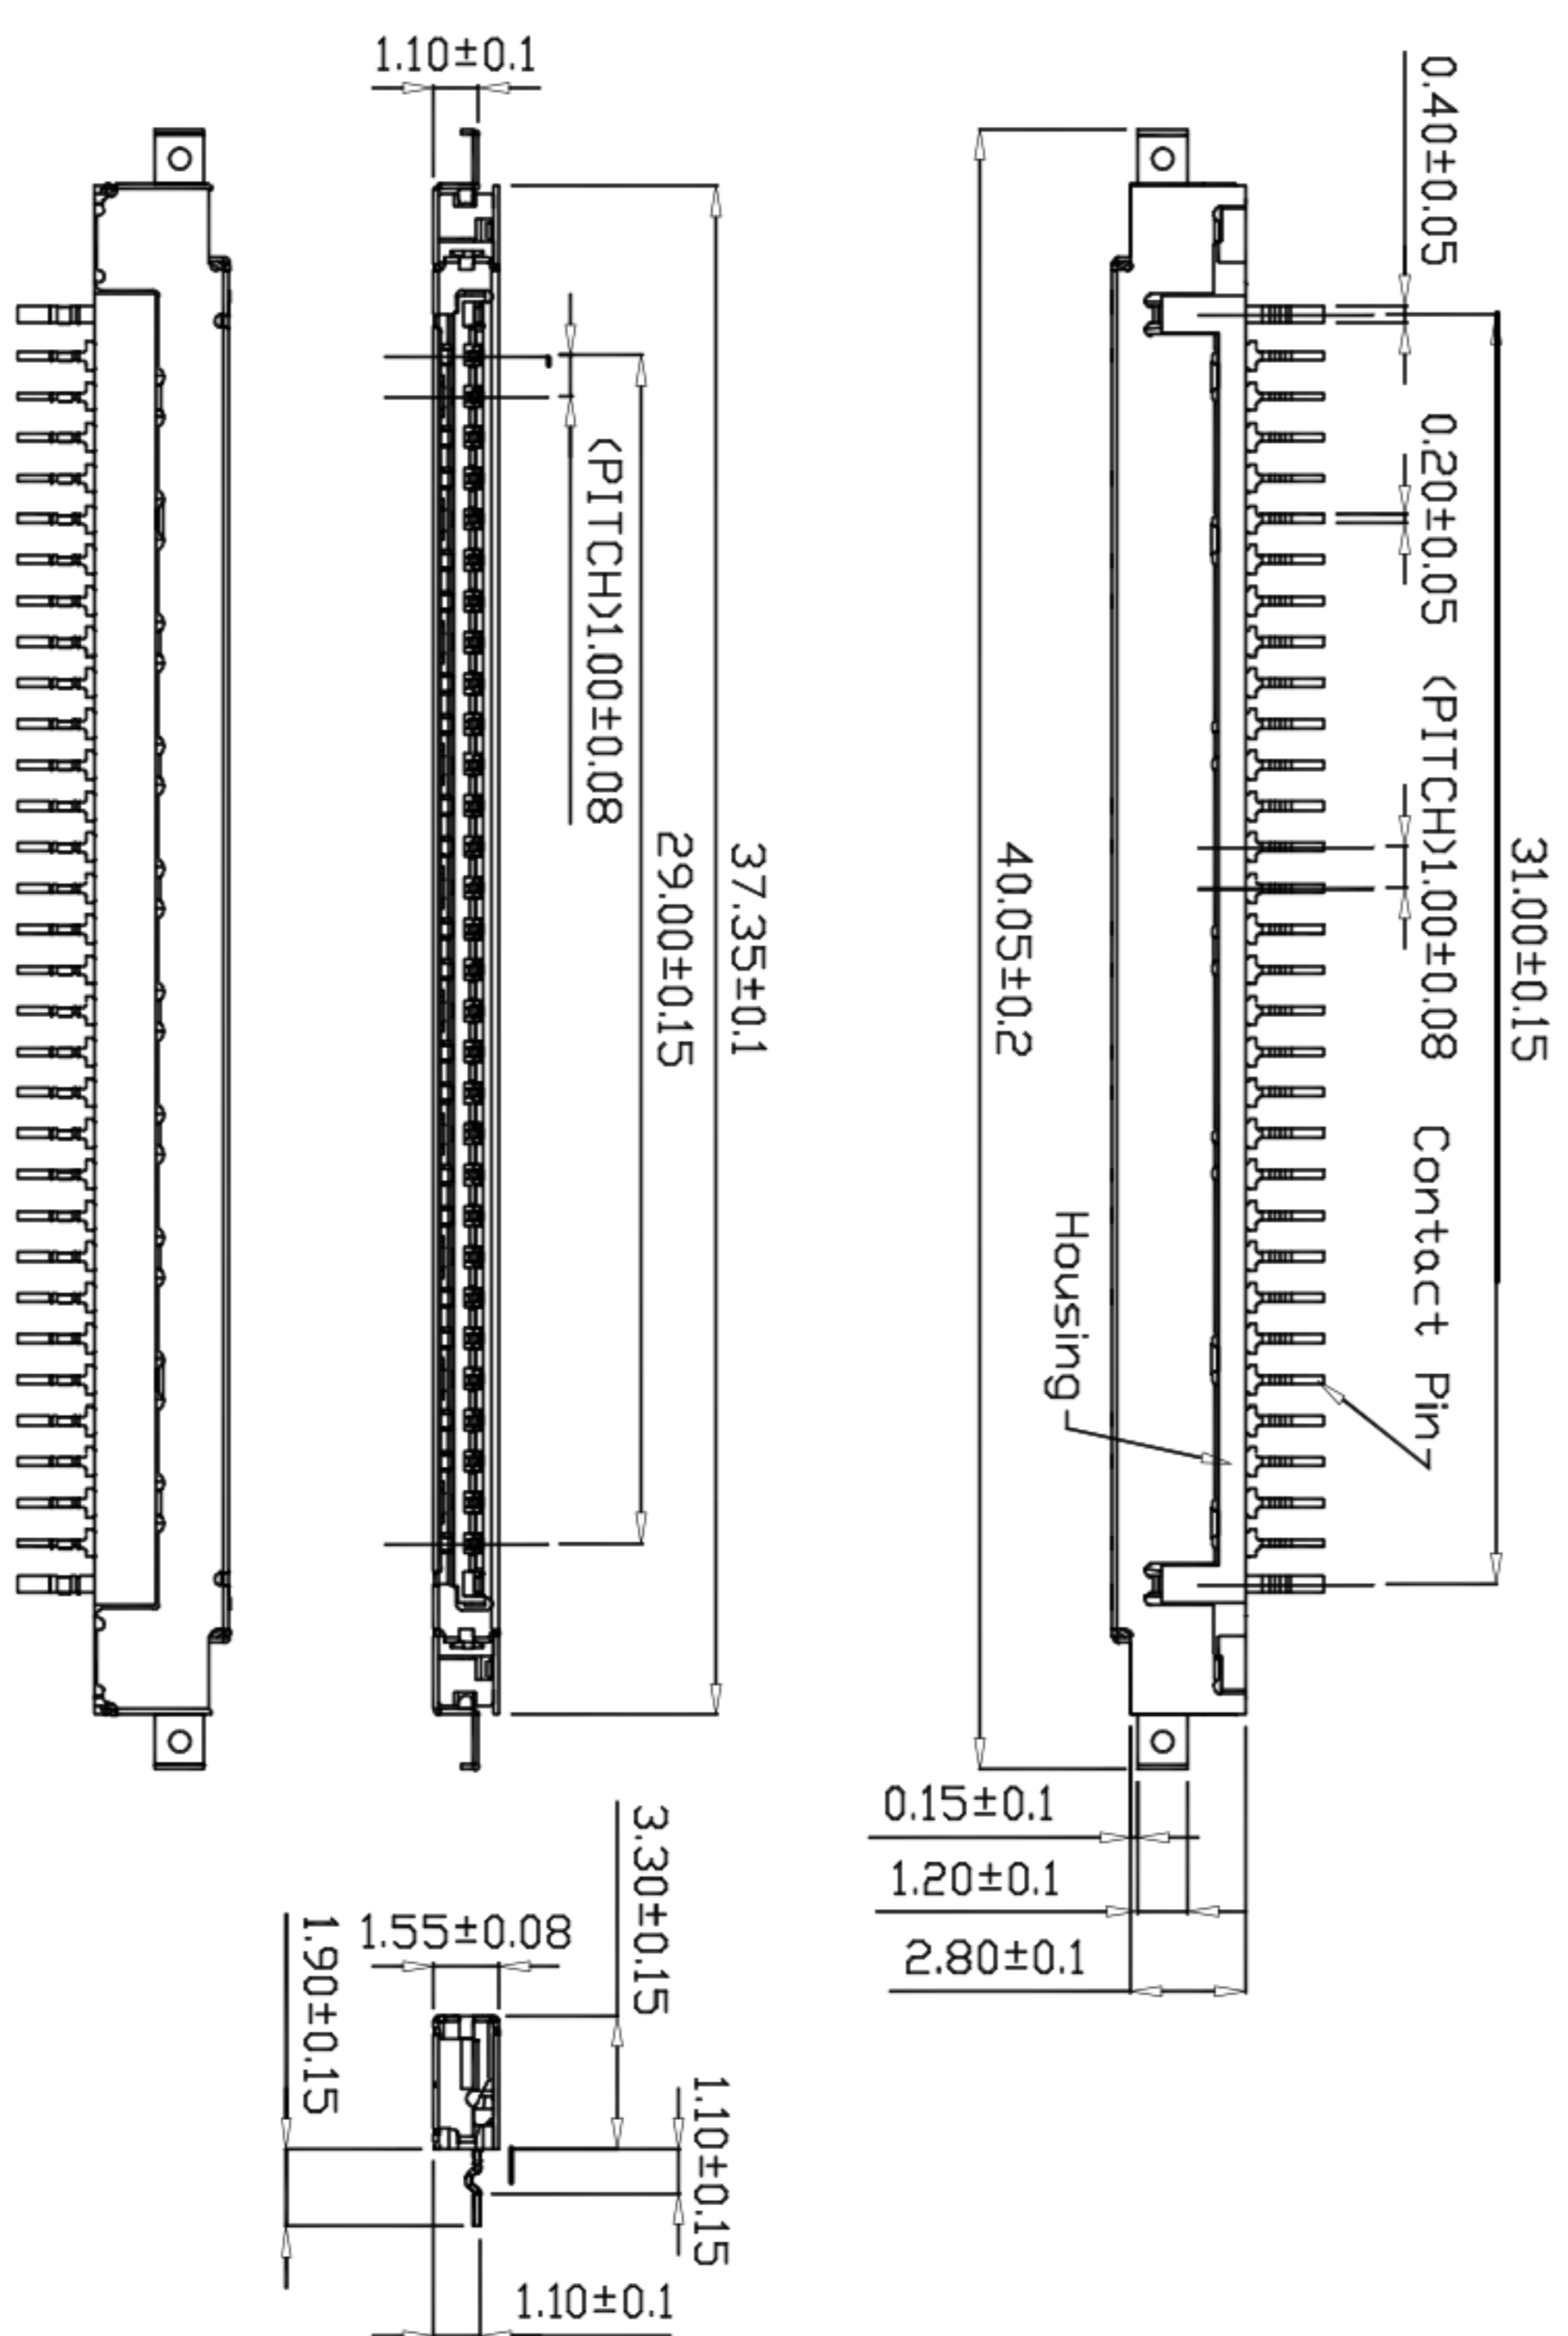

PERFORMANCE

Electrical Rating: AC/DC 30V 1A
 額定電壓電流
 Insulation Resistance: 100MΩ min.
 絕緣阻抗
 Withstanding Voltage: 500V AC/minute
 耐電壓
 Temperature Range: -40°C~+85°C
 適用溫度

CONNECTOR

Reinforce - Through Board - Reverse

Part No.: 1000WR-S-NP
 產品編號
 Material: Housing: LCP 94V-0, gray
 塑膠座 灰色
 Contact Pin: PHOS, plated with
 接觸針 磷青銅
 Reinforcement: Stainless Steel,
 補強片 不銹鋼
 50% of each gold and tin.
 鍍半金錫
 Square Contact Pin: 0.20±0.05mm
 方型針 鍍半金
 Ground Pin: 0.40±0.05mm
 接地針
 Packing: 2,000PCS(Reel)
 包裝數量

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			

APPROVALS		DATE	TITLE:				
DRAWN	ZHIWEI.CHEN	2015.07.07	1.00mm Crimp Style Connector				
CHECKED			PART NO. GP01-1000WRS-NP				
APPROVALS			SCALE: 1:1				
TOLERANCES ARE			30~以上	±0.30	ANGLE	UNIT: mm	PROJ.
			10~30	±0.20		SCALE: 1:1	
			5~10	±0.15	±2'	DRAWING NO.	SHEET 1 OF 1
			~ 5	±0.10			

深圳市联丰电子有限公司
 SHENZHEN LINFENG ELECTRONIC CO.,LTD