





**Specifications/备注 (Remark)**

1-材料 (MATERIAL)

胶芯: PA9T+30%G.F UL94V-0, 颜色: 黑色  
 Housing: PA9T+30%G.F UL94V-0, Color: Black  
 四方针: 黄铜/镍底30U"MIN/表面镀金0.8U"MIN  
 Contact: Brass/0.8U"MIN GOLD PLATING  
 OVER ALL 30U"MIN NICKEL UNDERPLATING  
 OVER ALL

2-特性 (characteristics):

额定电流: 0.75 AMP  
 Rating Current: 0.75 AMP  
 接触阻抗: 20mΩ MAX.  
 Contact Resistance: 20mΩ MAX.  
 绝缘阻抗: 1000MΩMIN.  
 Insulating Resistance: 1000MΩMIN.  
 耐电压: AC 500V.  
 Withstanding Voltage: AC 500V.  
 温度范围: -40度至+105度  
 Temperature Range: -40°C to +105°C

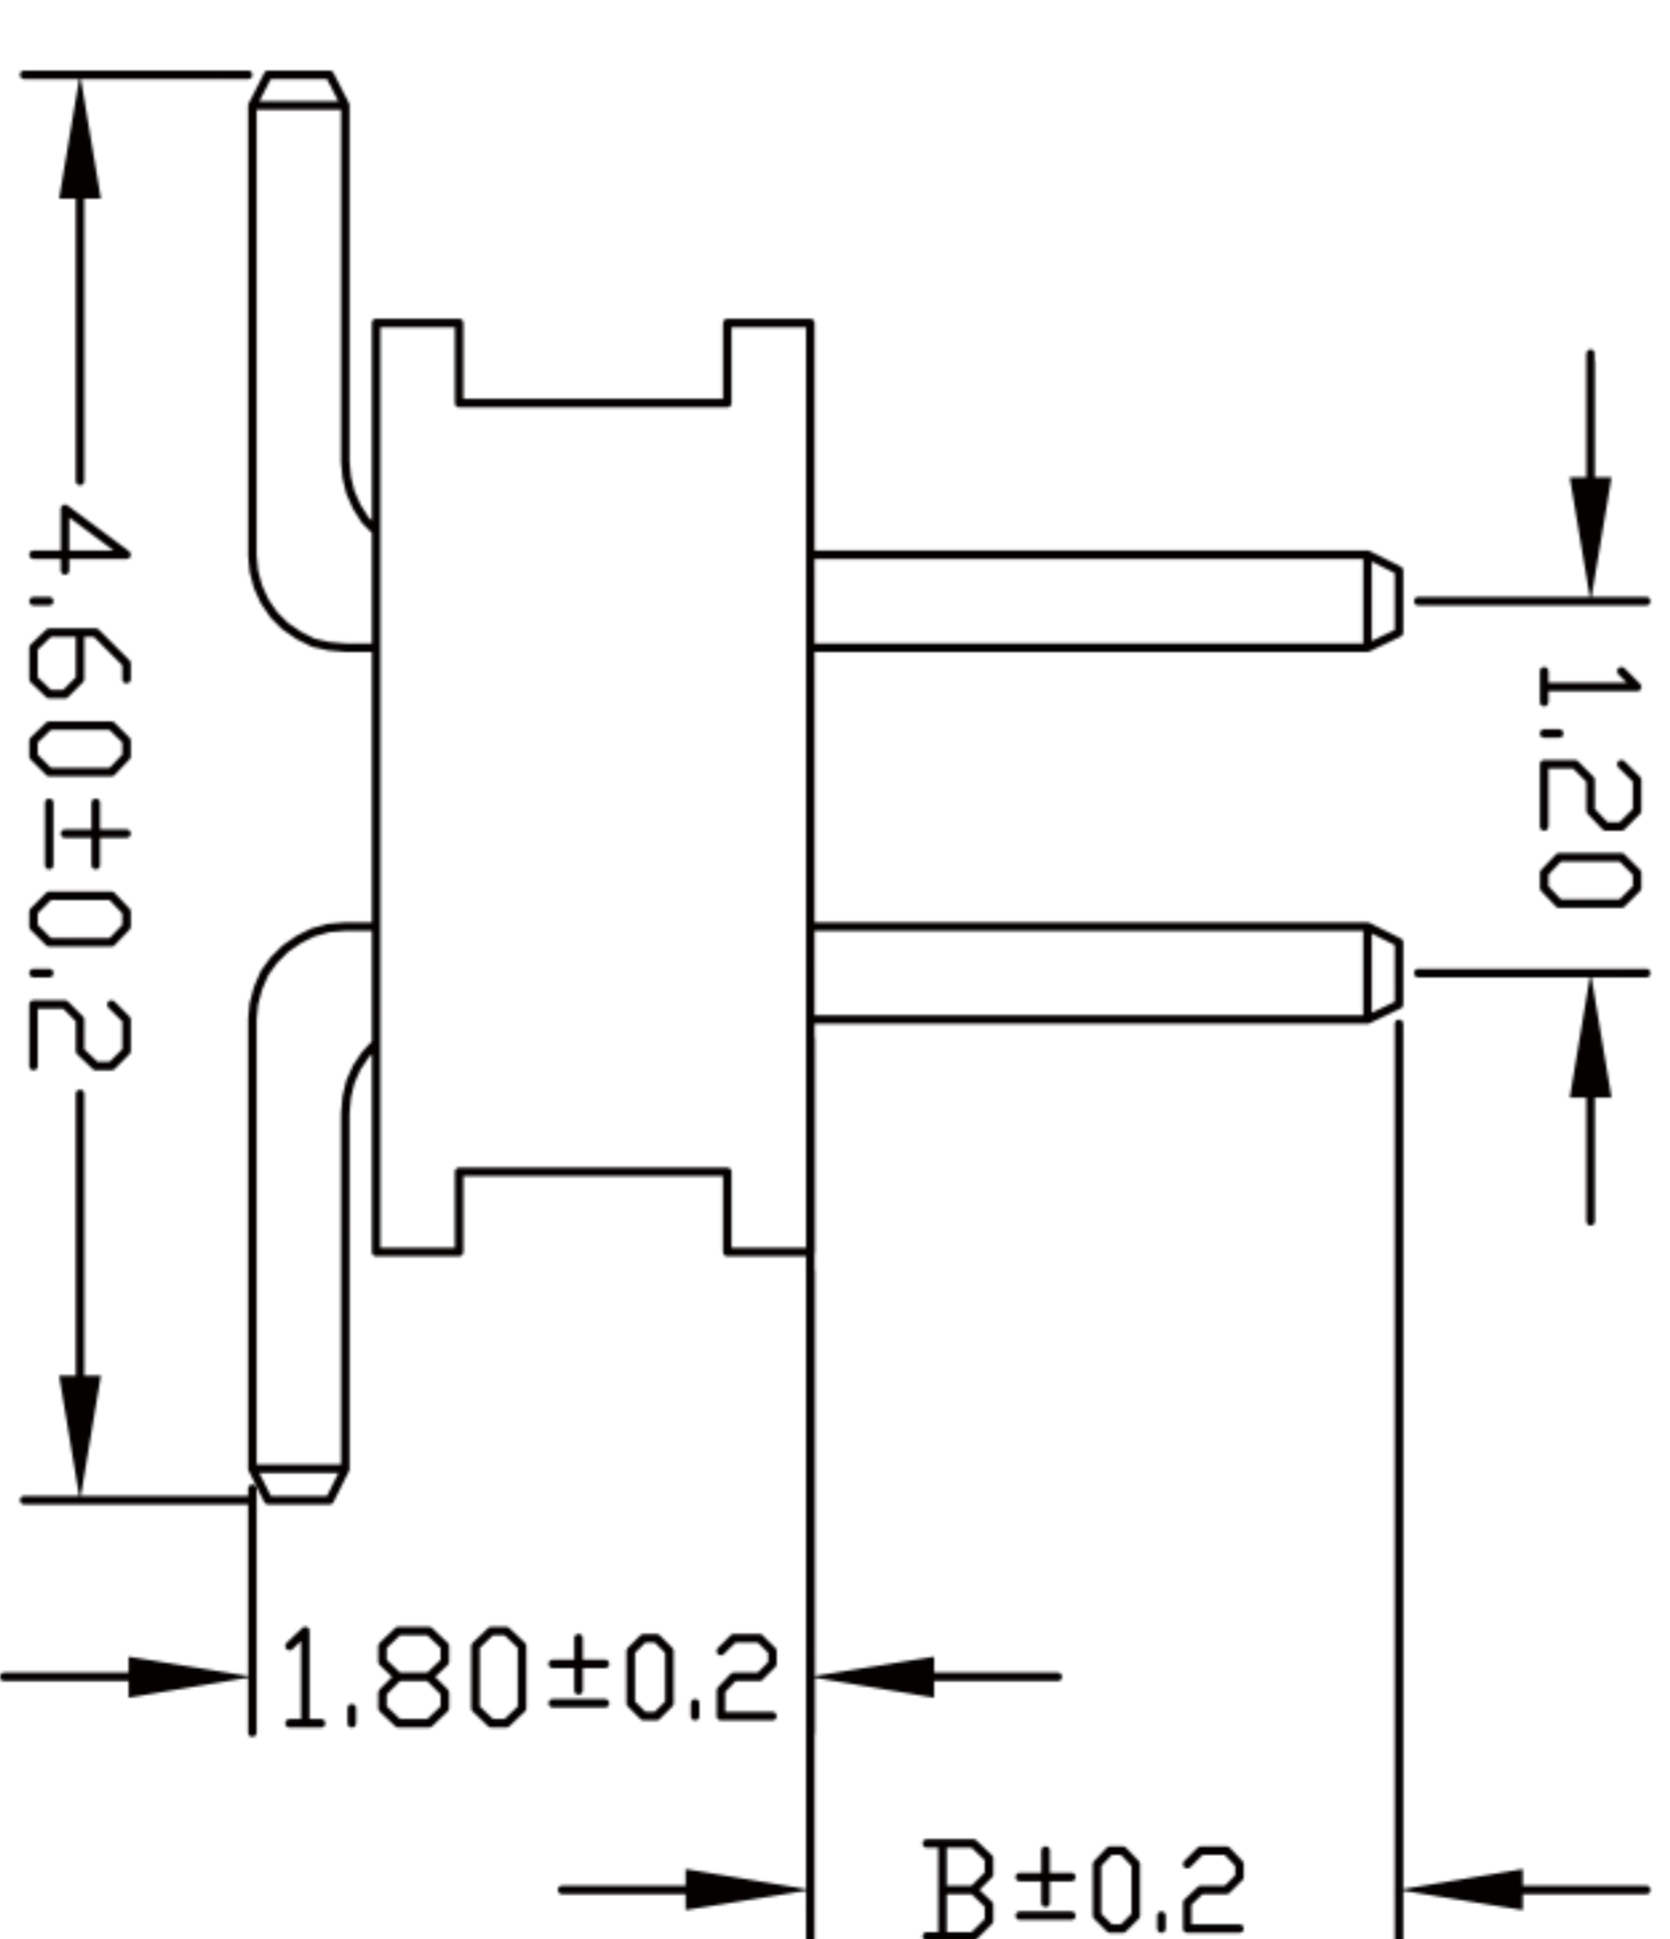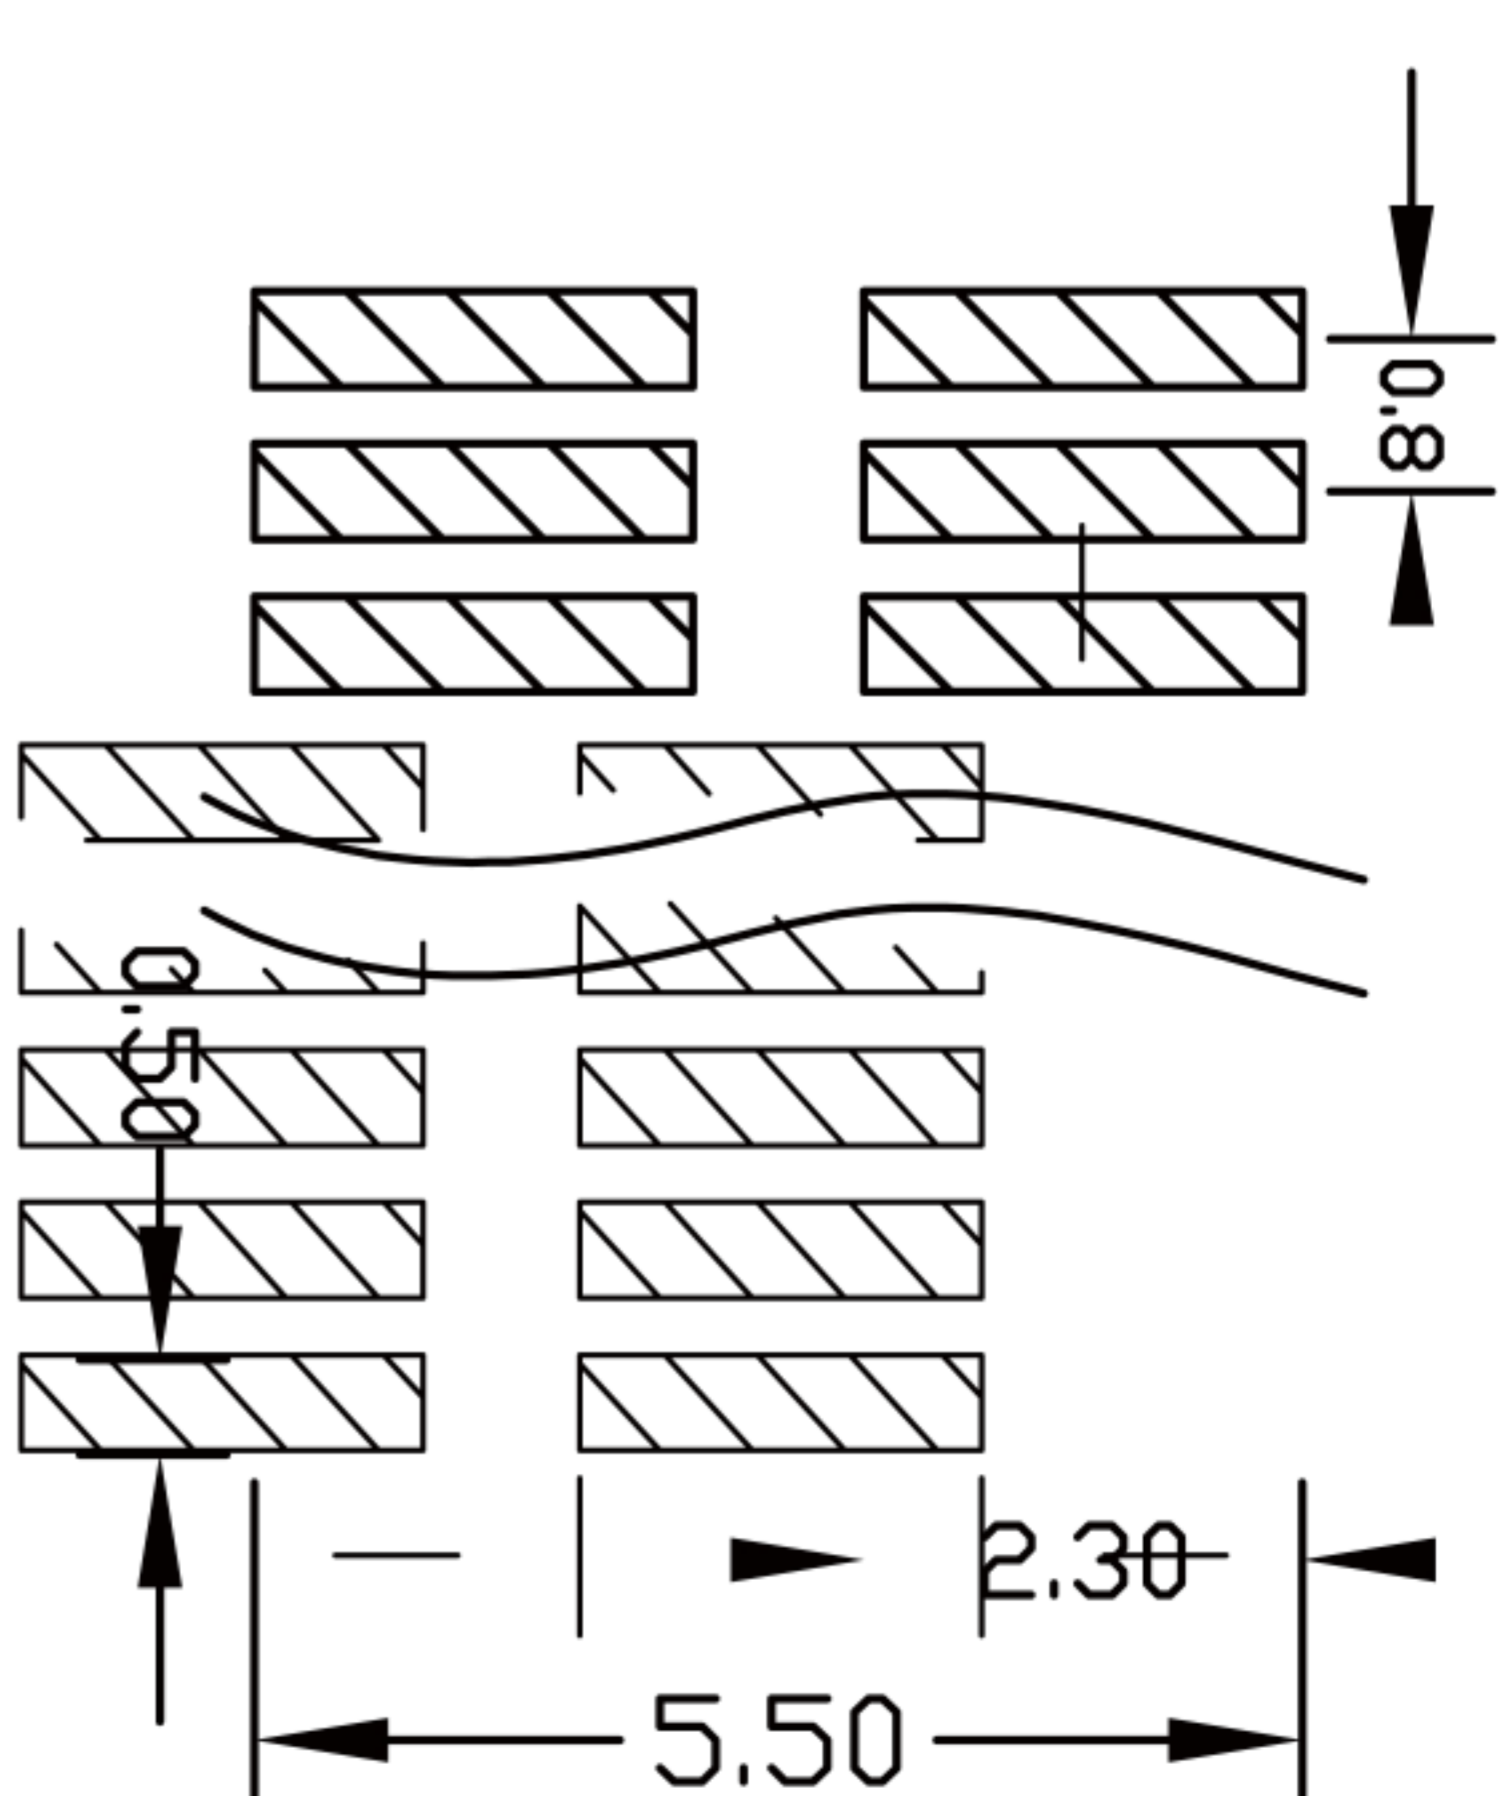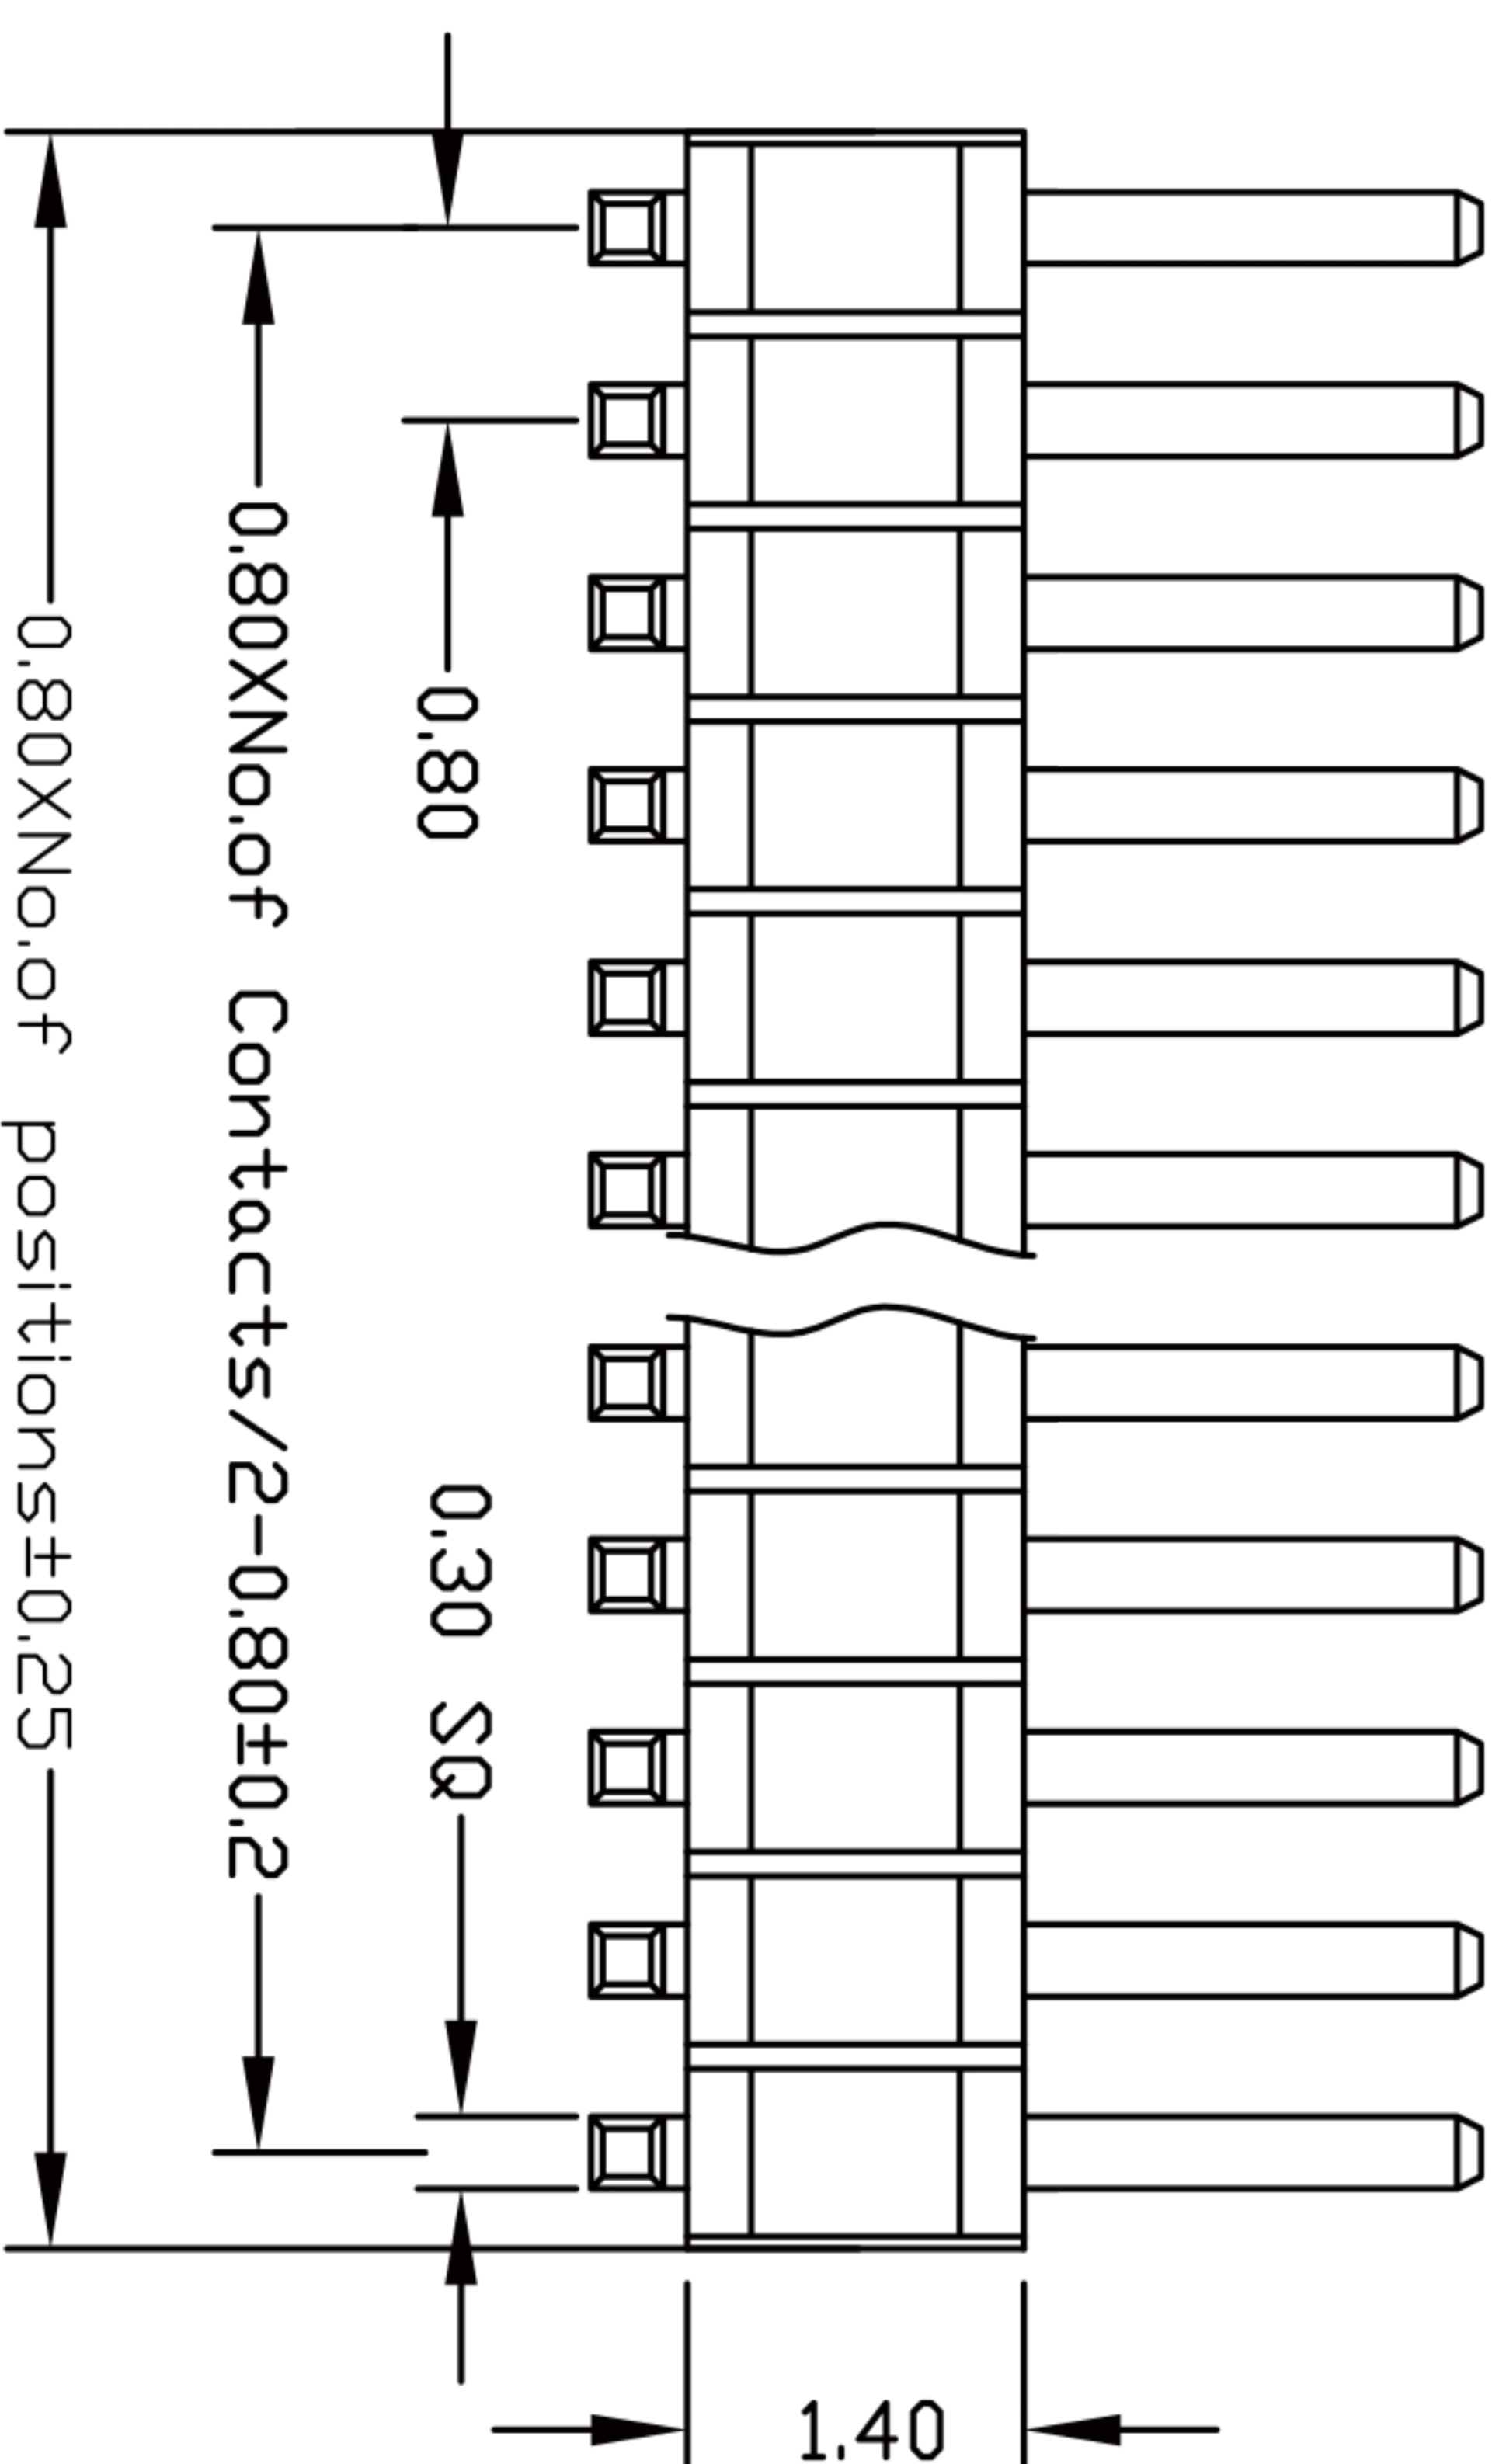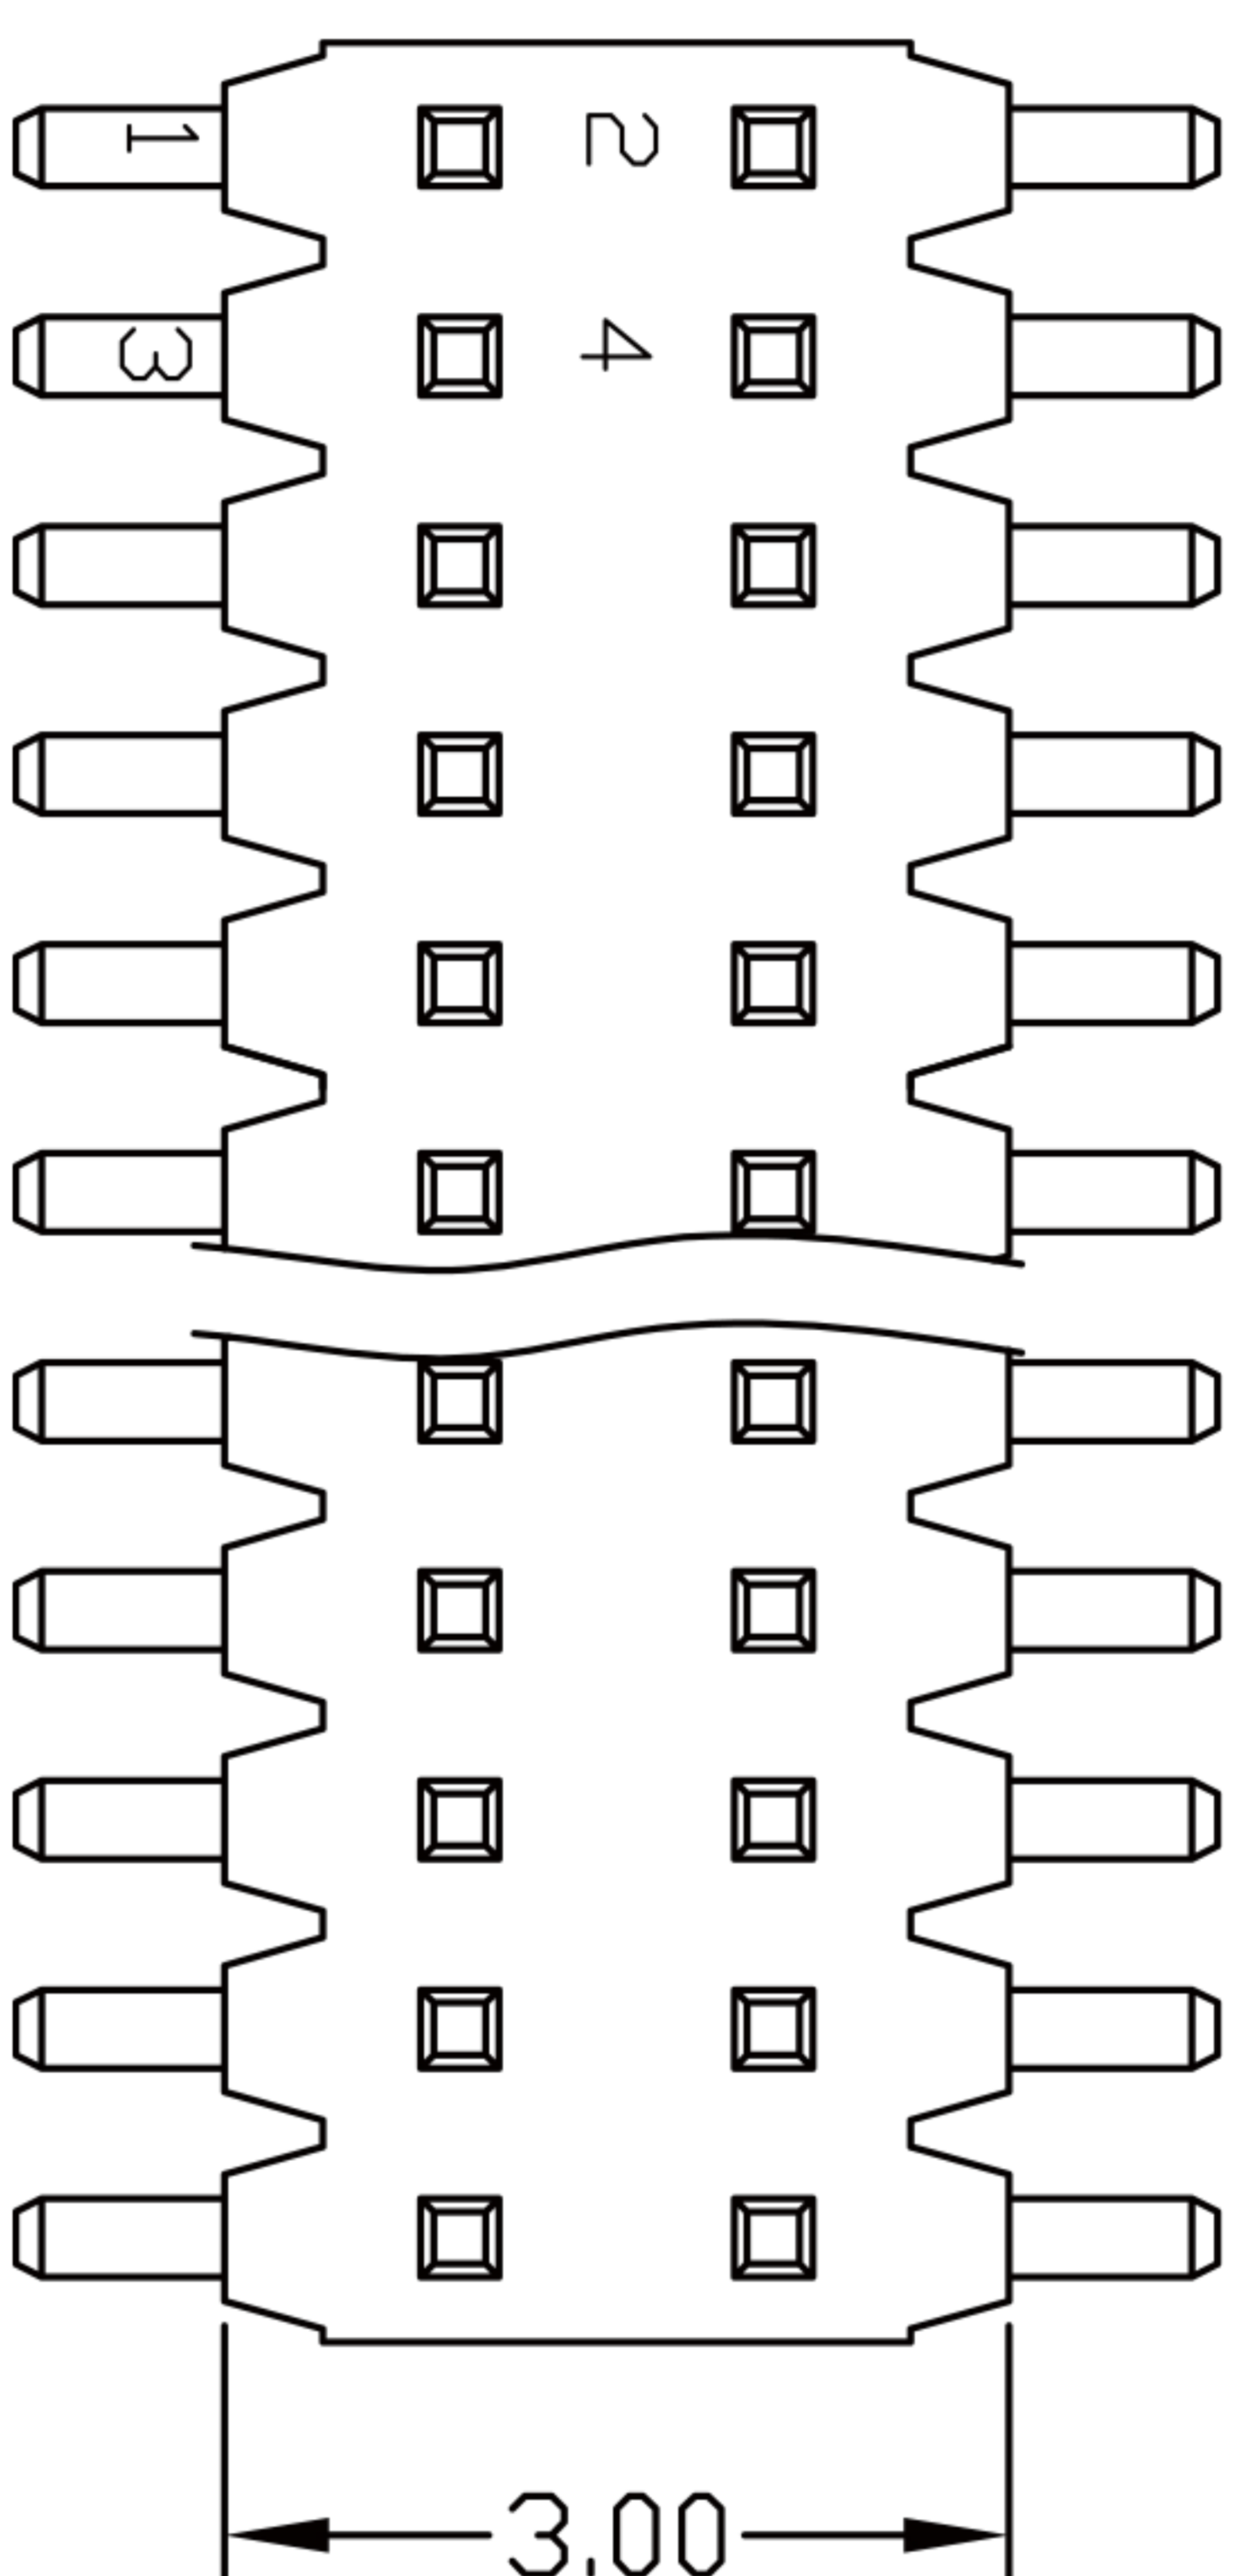

Dimension antitheses list			
ITEM	B		
Standard	1.9	2.8	4.45
Alternate			

ECN NO.	REV.	DATE.	DESCRIPTION.
	A		NEW

APPROVALS		DATE	TITLE:	
DRAWN	ZHIWEI.CHEN	2015.07.07	0.8mm 双排排针 单塑SMT	
CHECKED			PART NO. GP26-0802WVS-2XNP	
APPROVALS			UNIT: mm	SCALE: 1:1
TOLERANCES ARE		30~以上 ±0.30	ANGLE	PROJ.
		10~30 ±0.20		
		5~10 ±0.15		
		~ 5 ±0.10	±2°	DRAWING NO.
CHANGE.	CHECK.	APPRO.		SHEET 1 OF 1

**深圳市联丰电子有限公司**  
 SHENZHEN LIENFENG ELECTRONIC CO.,LTD