


**Specifications/备注 (Remark)**

**1-材料 (MATERIAL)**

胶芯: LCP+30%G.F UL94V-0, 颜色: 黑色  
 Housing:LCP+30%G.F UL94V-0,Color:Black  
 四方针: 黄铜/镍底30u"MIN/表面镀金0.8u"MIN  
 Contact: Brass/0.8u"MIN GOLD PLATING  
 OVER ALL 30u"MIN NICKEL UNDERPLATING  
 OVER ALL

**2-特性 (characteristics):**

额定电流: 0.75 AMP  
 Rating Current:0.75 AMP  
 接触阻抗: 20mΩ MAX.  
 Contact Resistance:20mΩ MAX.  
 绝缘阻抗: 1000MΩMIN.  
 Insulating Resistance:1000MΩMIN.  
 耐压: AC 500V.  
 Withstanding Voltage:AC 500V.  
 温度范围: -40度至+105度  
 Temperature Range: -40°Cto +105°C

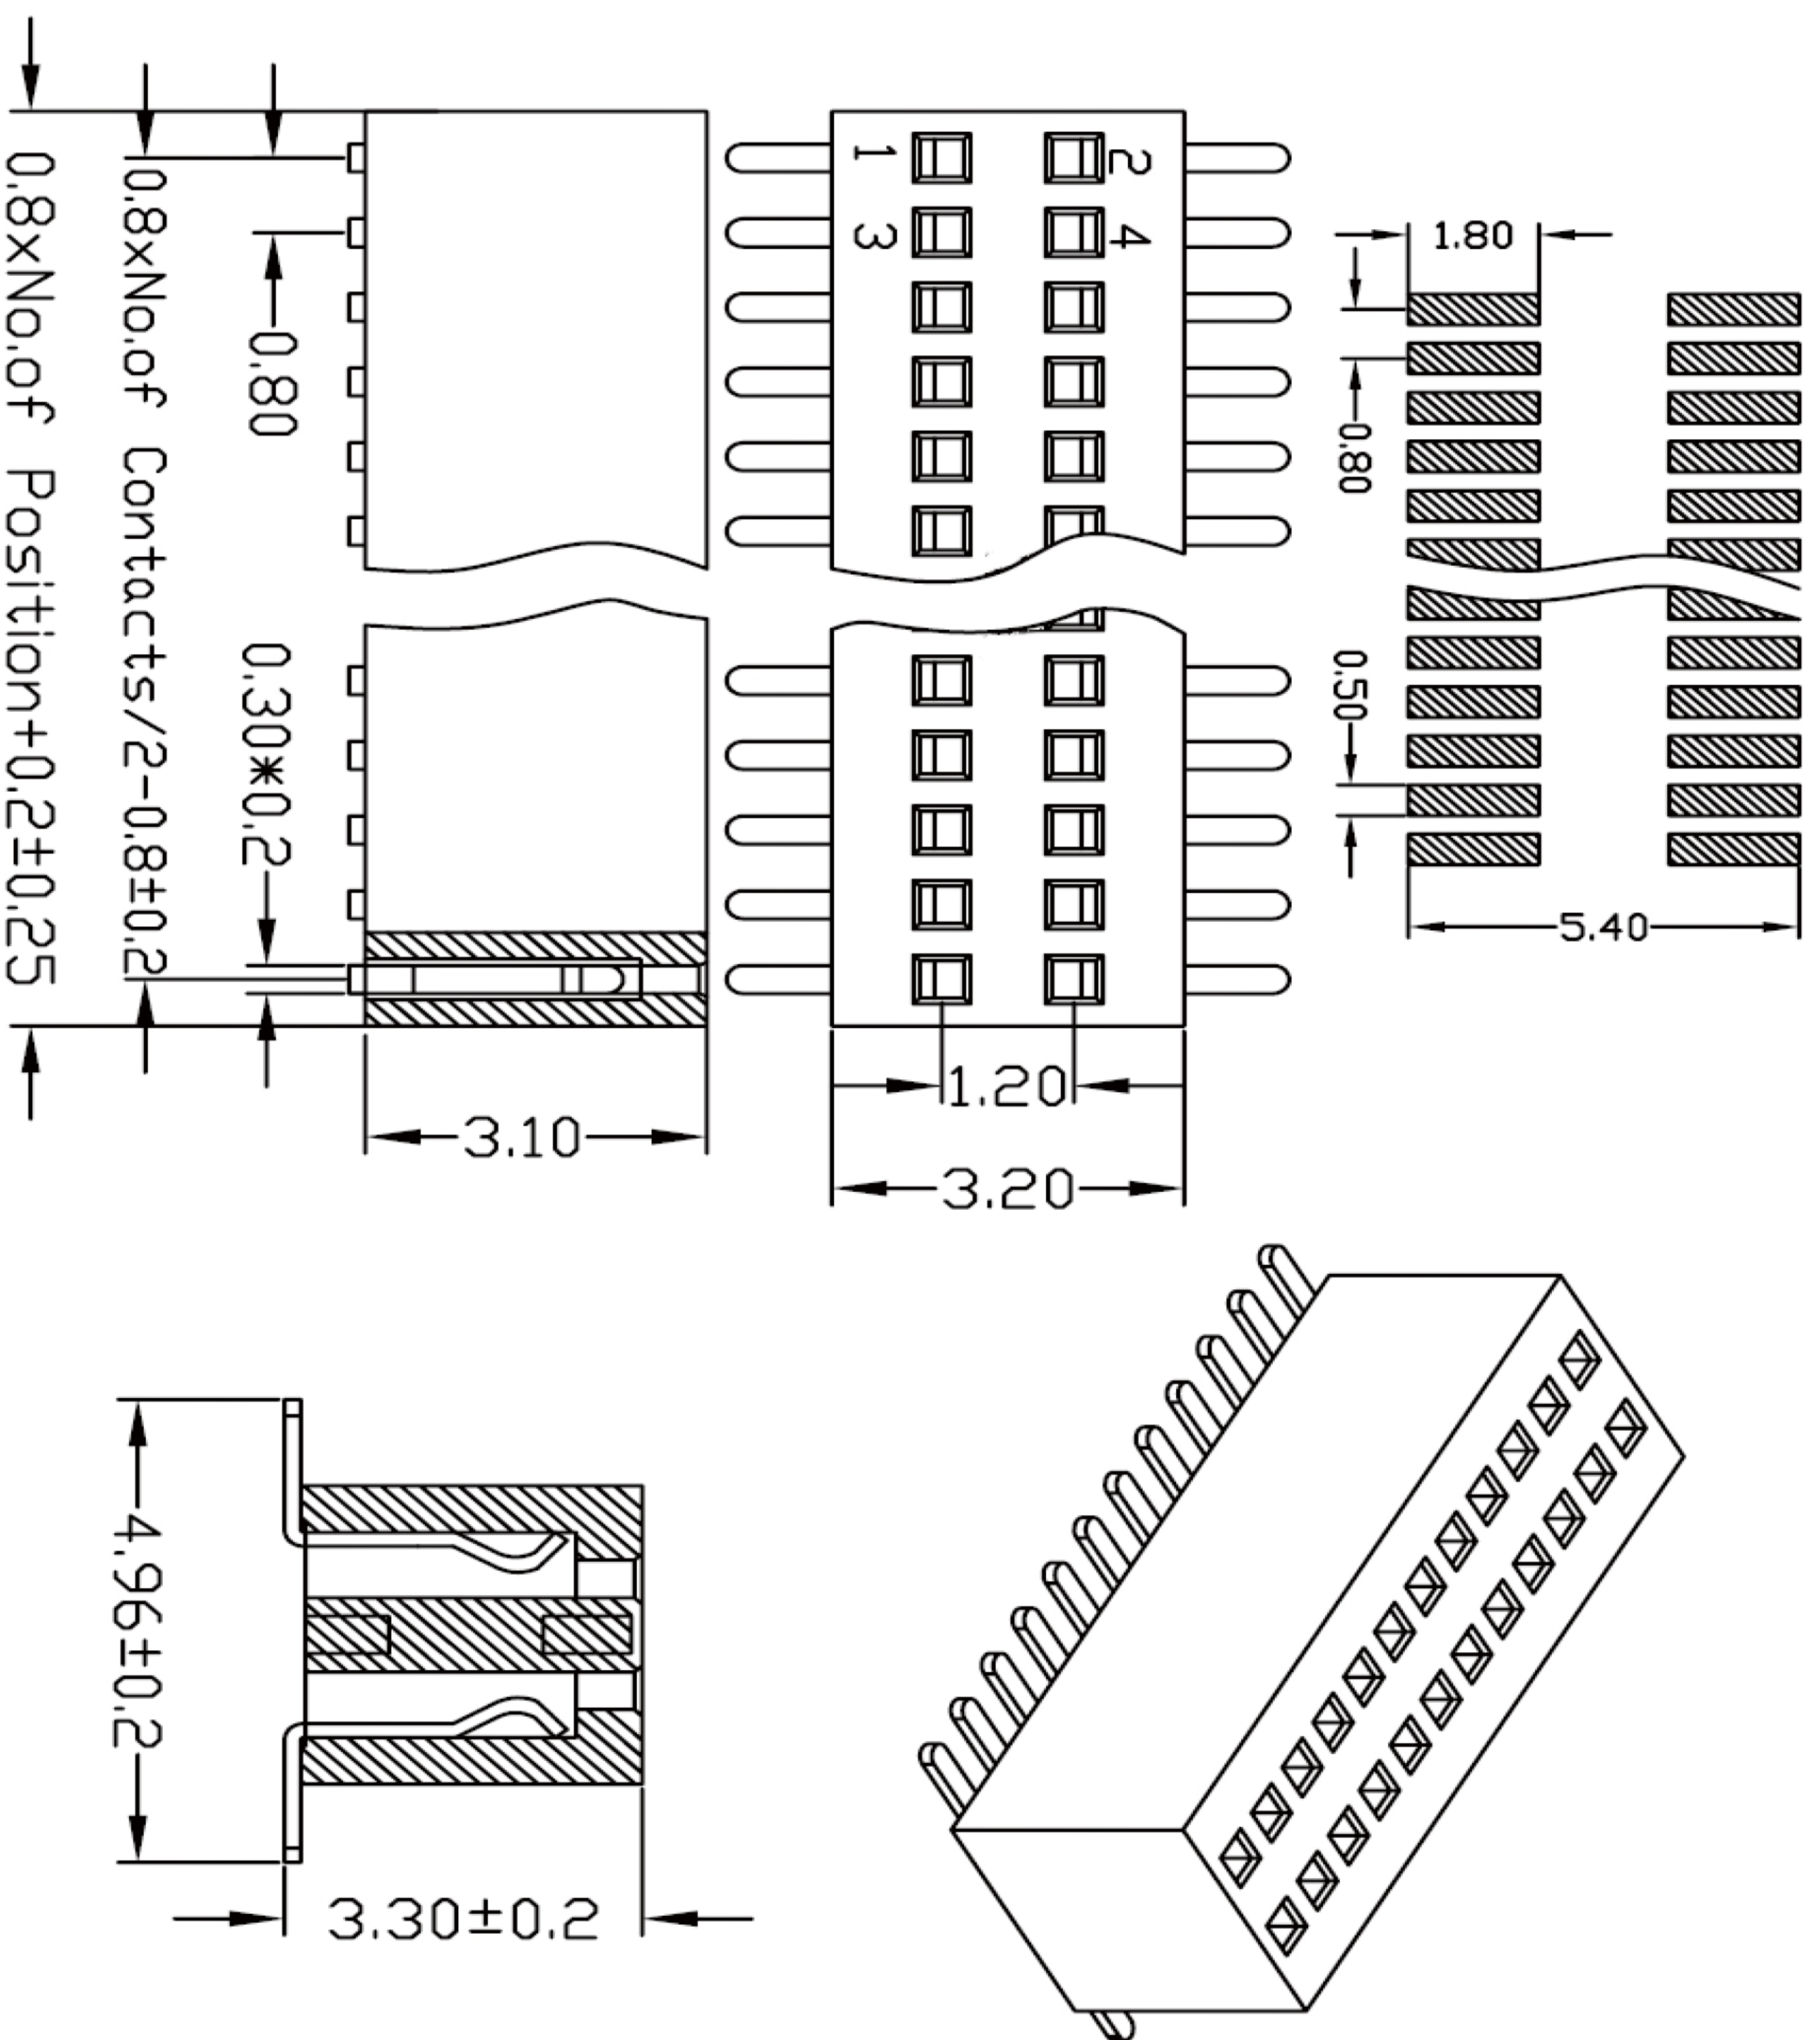

APPROVALS		DATE	TITLE:	
DRAWN	ZHIWEI,CHEN	2015.07.07	PART NO.	GP25-0811WVS-2XNP
CHECKED			UNIT: mm	SCALE: 1:1
APPROVALS			DRAWING NO.	PROJ:
TOLERANCES ARE		30~以上 ±0.30		
		10~30 ±0.20		
		5~10 ±0.15		
		~ 5 ±0.10		
ANGLE	±2°			
ECN NO.	REV.	DATE.	DESCRIPTION.	SHEET 1 OF 1
	A		NEW	

**深圳市联丰电子有限公司**  
 SHENZHEN LINFENGYING ELECTRONIC CO.,LTD