ROHS

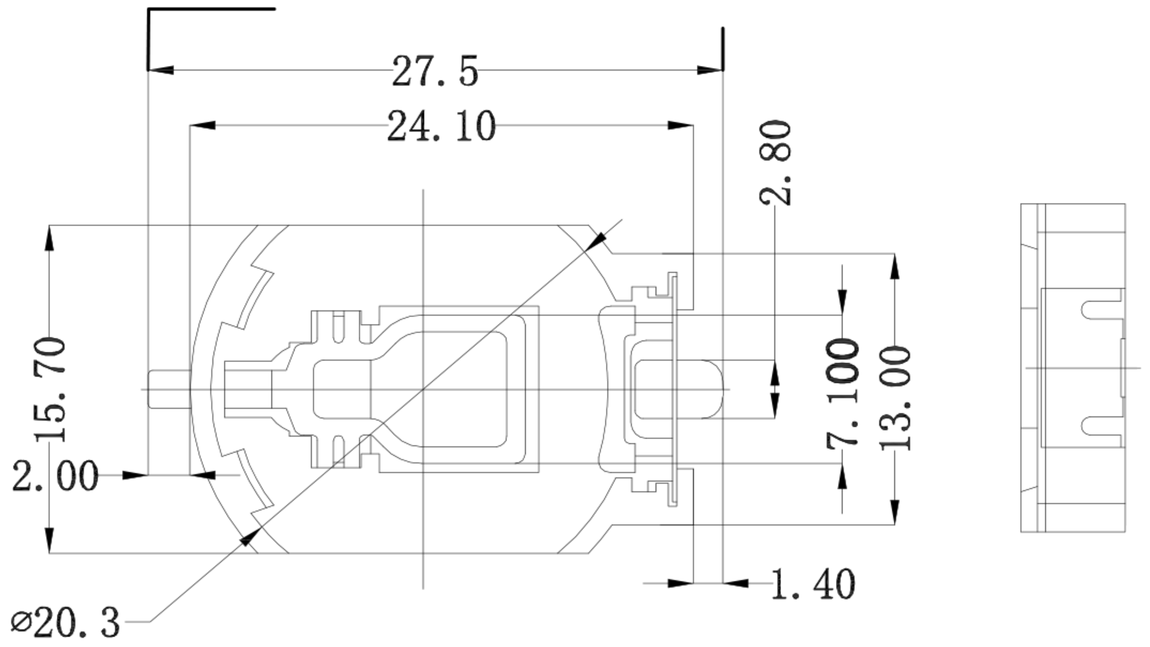

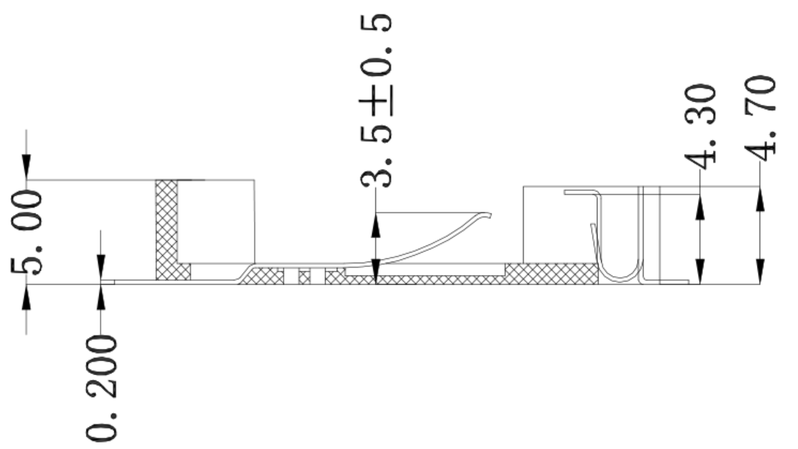

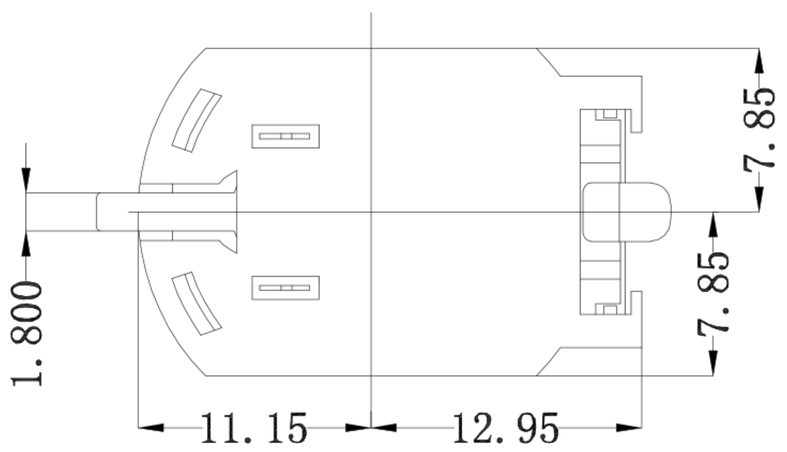

NOTE:

1. MATERIAL:
   a. HOUSING:PPA
   b. CONTACT:PHOSPHOR BRONZE
      (SURFACE PLATING: Au*u″)
      SEE ORDERING INFORMATION
2. ELECTRIC:
   a. CONTACT RESISTANCE: 30 MILLIOHMS MAX
   b. INSULATION RESISTANCE: 1000 MEGA OHMS MIN
   c. DIELECTNIC VOLTAGE: 500V AC ONE SEC LEVEL
   d. OPERATING TEMPERATURE: -25° C~ +85° C

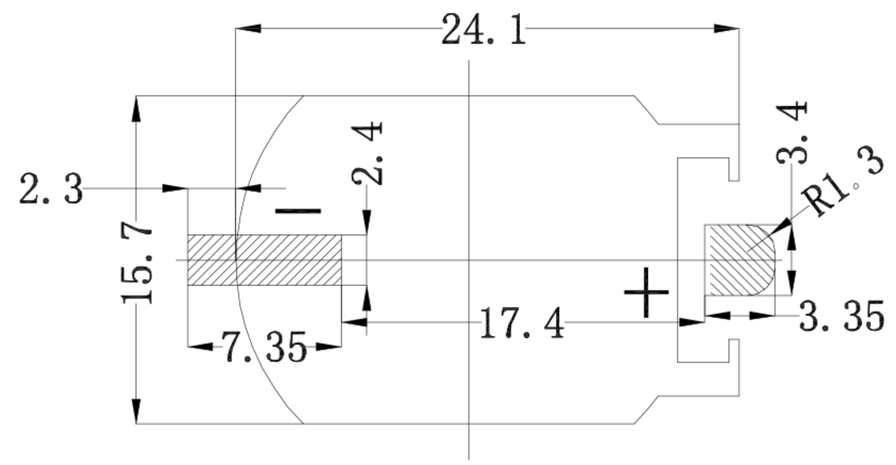

PCB Layout Diagram
Top View

NO	PAPT NAMF	0' TY	MATFPIAI	PI ATINC ℓ COI OP
3	TERMINAL(-)	1	PHOSPHOR BRONZE, T=0.20MM	Gold Plating and Ni Under-Plating
2	TERMINAL(+)	1	PHOSPHOR BRONZE, T=0.20MM	Gold Plating and Ni Under-Plating
1	HOUSING	1	PPA	BLACK

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
———	A	———	NEW	———	———	———

	DATE	深圳市联丰盈电子有限公司 SHENZHEN LINFENYING ELECTRONIC CO.,LTD	
	2015.07.07		
CHECKED		TITLE:	电池座 SMT
APPROVALS		PART NO.	GP07-CR2032-05
TOLERANCES ARE: 30~以上 ±0.30; 10~30 ±0.20; 5~10 ±0.15; ~ 5 ±0.10; ANGLE ±2°		UNIT: mm / SCALE: 1:1 / PROJ:	
		DRAWING NO. ———	SHEET 1 OF 1